
HI–LITE MFG. CO., INC.
13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Aries Collection

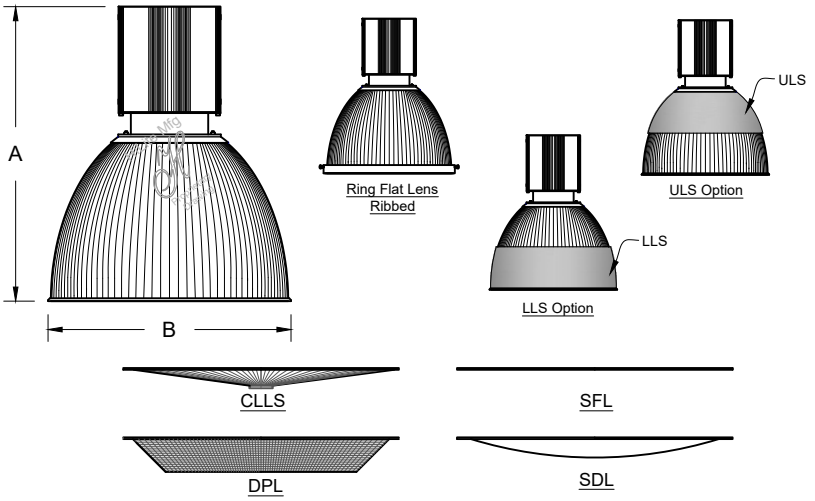

Item Number	Height (A)	Width (B)
H-23720	15 1/2"	12"
H-23724	19 1/2"	16"
H-23728	23"	22"

Fixture.	–	FInish	–	Lens	/	Mounting	–	Mounting Color	/	Optional Accessories	–	Accessory Color	/	Wattage/ Lamp options	–	LED Color Temp	–	Driver
H-23720(1) **H-23724**(1) **H-23728**(1)		Standard **91** (Black) **93** (White) **95** (Dk. Grn) **96** (Galv.) **BR47** (Rust) **BK01, GN20.** Upgraded Finishes **01,11,14, 22,24,25,26, 29, 33,41,44, 48,49,66,74, 77,82,89,92, 94,97,98,100, 101,102,112, 117,118,119, 121,122,123, 124,127,128, 130,133,134, 135,136,137, 139,140,141, 145,146,147, 148,150,151, 152,153,154, 155,156,157, 158,165,991** For finish specs see pages 344-348.		**RIB** (Clear Ribbed) **FR** (Frost) **Colored** (2) **Lenses** Consult factory for color options. Pink, Light Blue, Dark Blue, Light Green, Dark Green, White, Red, Amber.		Mounting Options **1/2"** **3/4"** Cord Options (3) **ACB8** (8' Blk Cord & Aircraft Cable) **ACW8** (8' Wht Cord & Aircraft Cable) **ACG8** (8' Gray Mesh Cord & Aircraft Cable) Custom Cord (3) Options **ACB___** (Black & Aircraft Cable) **ACW___** (White & Aircraft Cable) **ACG___** (Gray Mesh & Aircraft Cable) Specify length. Stem Options (Stem 1/2") **___ST** Specify length and canopy. **HSC** (Canopy) **SMC** (Canopy) Flush Mount Options **FHSC** **FSMC** For all arms and specs see pages 321-344.		Standard **91** (Black) **93** (White) **95** (Dk. Grn) **96** (Galv.) **BR47** (Rust) For all finishes see pages 344-348.		**ULS** (Upper Light Sheild) **LLS** (Lower Light Sheild) **CLLS** (4) (Conical Lens) **SDL**(4) (Smooth Domed Lens) **SFL**(4) (Smooth Flat Lens) **DPL**(4) (Dropped Lens) **RING** (Ring W/ Ribbed Flat Lens) For specs see pages 321-344.		Standard 91 (Black) 93 (White) 95 (Dk. Grn) 96 (Galv.) BR47 (Rust) **RIB** (Clear Ribbed) **CLR** (Clear) **FR** (Frost) **CLR** (Clear) **FR** (Frost) **RIB** (Clear Ribbed) For all finishes see pages 344-348.		Incandescent **INC** (Fixture is standard 100W or 200W Medium Base.) **GU24** (2-Pin Twist Lock Socket) (5) LED4 series (Not available with glass enclosures) **6LED4** (850 Lumens) **10LED4** (1250 Lumens) **14LED4** (1650 Lumens) **18LED4** (2000 Lumens) **20LED4** (2500 Lumens) **23LED4** (3000 Lumens) **29LED4** (3500 Lumens) **34LED4** (4000 Lumens) **CFL/MH/HPS** (Compact Fluorescent) (Metal Halide & High Pressure Sodium) **Contact Factory for availability**		LED Color Temp not available for INC or GU24. **27** (2700K) **30** (3000K) **35** (3500K) **40** (4000K) For specs See LED Spec Sheet Online		Driver not available for INC or GU24. **CBCM** (Cord Driver Housing) **SBCM** (Stem Driver Housing) For specs See LED Spec Sheet Online

H-23720	-	91	-	CLR	-/	1/2"	-	91	/	CLLS	-	RIB	/	18LED4	-	27	-	CBCM

ORDER EXAMPLE
(USE THIS FORMAT TO PLACE ORDER)

Notes:

(1) H-23720 available for 200W Max INC, 1 or 2 42W Max CFL and 100 W Max HID.
H-23724 available for 200W Max INC, 1,2,3 or 4 42W Max CFL and 150W Max HID.
H-23728 available for 200W Max INC, 1,2,3,4,5, 6, 7 or 8 42W Max CFL and 175W Max HID.
H-23728 not available as an arm mount.

(2) Colored Lenses available for H-23740 only.

(3) Cord Mounting wattage not to exceed 100 for HID.
Gray Mesh Cord not available for HID.

(4) CLLS available for H-23720, H-23724 and H-23728.
SDL available for H-23720.
SFL available for H-23720, H-23724 and H-23728.
DPL available for H-23724 and H-23728.

(5) Socket Bases: INC and HID are medium base. CFL is GX24Q.,GU24 is 2-pin Twist lock, LED is Dedicated with a driver and Module
INC & GU24 are standard 120 Volt & LED is standard 120/277 Volts.

INC,GU24,CFL & HID are UL Listed
LED is ETL Listed

Cord-hung fixtures: suitable for dry location only.
Stem-hung fixtures: suitable for damp & dry location.